


## ST-600

➡ ST-600 - REDUTOR MANUAL, GIRO DE 0° - 90°



VÁLVULAS INDUSTRIAIS

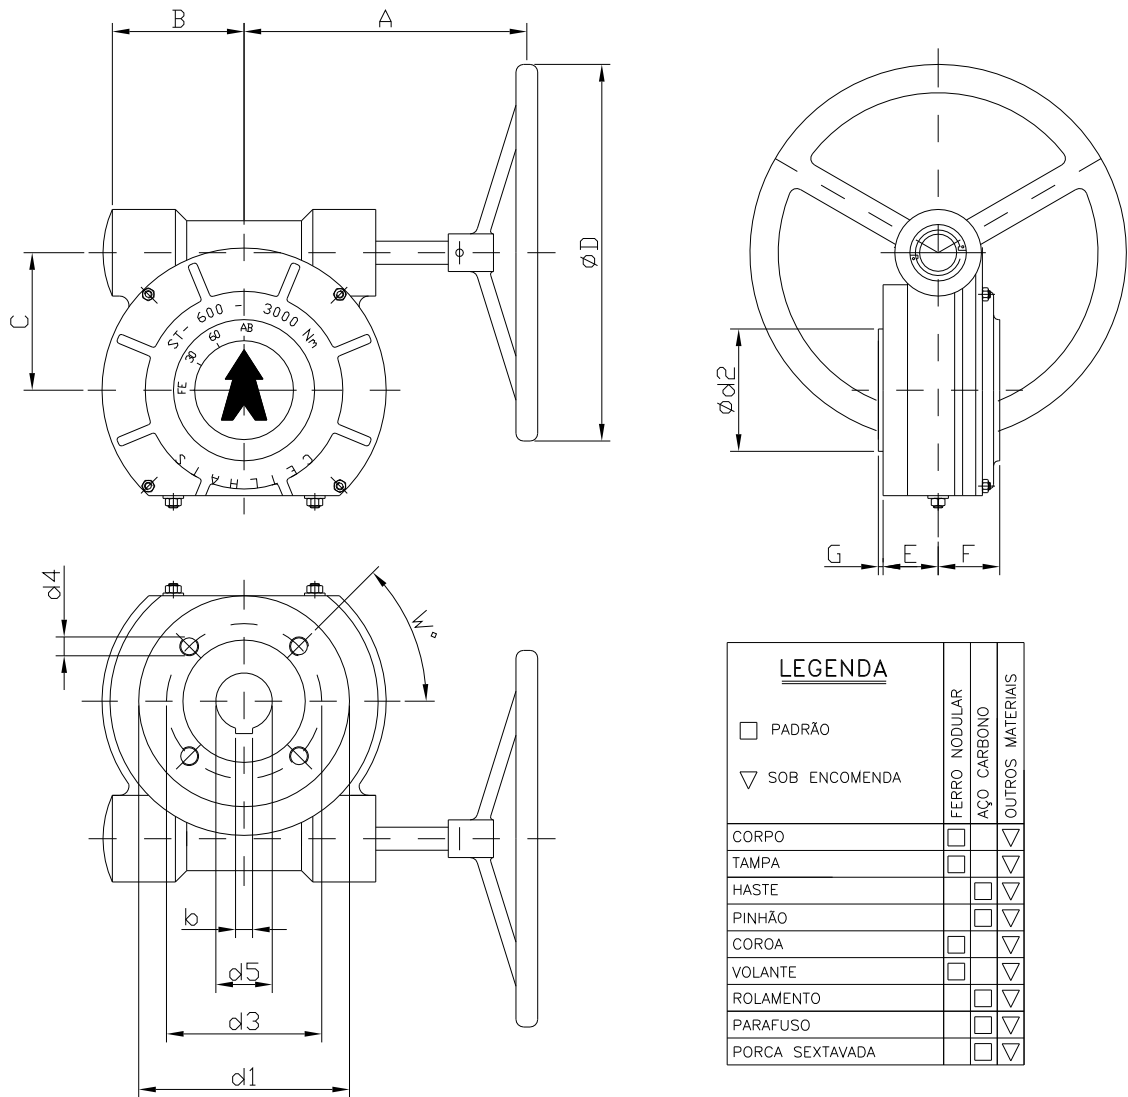

LEGENDA			
	FERRO NODULAR	AÇO CARBONO	OUTROS MATERIAIS
<input type="checkbox"/> PADRÃO			
<input type="checkbox"/> SOB ENCOMENDA			
CORPO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
TAMPA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
HASTE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PINHÃO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
COROA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
VOLANTE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ROLAMENTO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PARAFUSO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PORCA SEXTAVADA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

MODELO	TORQUE Nm		REDUÇÃO	EIXO DE ENTRADA	A	B	C	D	E	F	G
	NOMINAL	MÁXIMO									
ST-600-300	300	350	29:1	16	197	48	50	170	26	30	-
ST-600-500	500	600	36:1	16	210	55	60	250	28	30	-
ST-600-800	800	900	45:1	20	210	78	80	250	45	53	3
ST-600-1300	1300	1400	57:1	25	220	148	100	350	50	65	3
ST-600-2300	2300	2800	82:1	25	230	139	140	350	64	73	4
ST-600-3500	3500	4000	85:1	30	320	170	170	450	70	71	5
ST-600-5000	5000	5500	99:1	30	320	200	200	450	78	71	5
ST-600-6500	6500	7000	107:1	35	400	242	257	600	98	96	5

MODELO	d1	d2	d3	d4	d5	W°	b	ISO 5211	PESO Kg
ST-600-300	97	-	70	4 x M8	14 - 25	45°	5 - 8	F07	3,5
ST-600-500	120	-	102	4 x M10	20 - 25	45°	6 - 10	F10	6,5
ST-600-800	125	70	102	4 x M10	25 - 35	45°	8 - 10	F10	10,0
ST-600-1300	150	85	125	4 x M12	35 - 45	45°	10 - 14	F12	20,0
ST-600-2300	210	100-130	140-165	4 x M16/M20	45 - 60	45°	14 - 18	F14/F16	35,0
ST-600-3500	210	130	165	4 x M20	60 - 80	45°	18 - 24	F16	48,0
ST-600-5000	300	200	254	8 x M16	60 - 90	45°	18 - 24	F25	63,0
ST-600-6500	300	200	254	8 x M16	70 - 100	22.5°	20 - 28	F25	120,0