
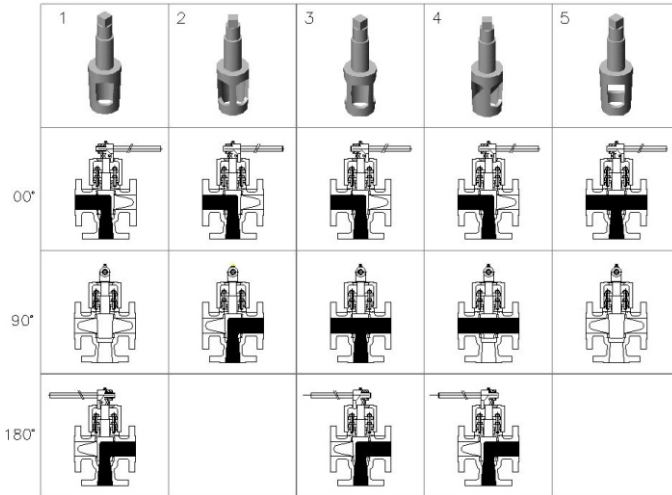


ST-941

- ➡ VÁLVULA MACHO - 3 VIAS VERTICAL - BUCHA - ANSI 150 / 300
- ➡ ACIONADA POR ALAVANCA, REDUTOR MANUAL, ELÉTRICO OU ATUADOR PNEUMÁTICO

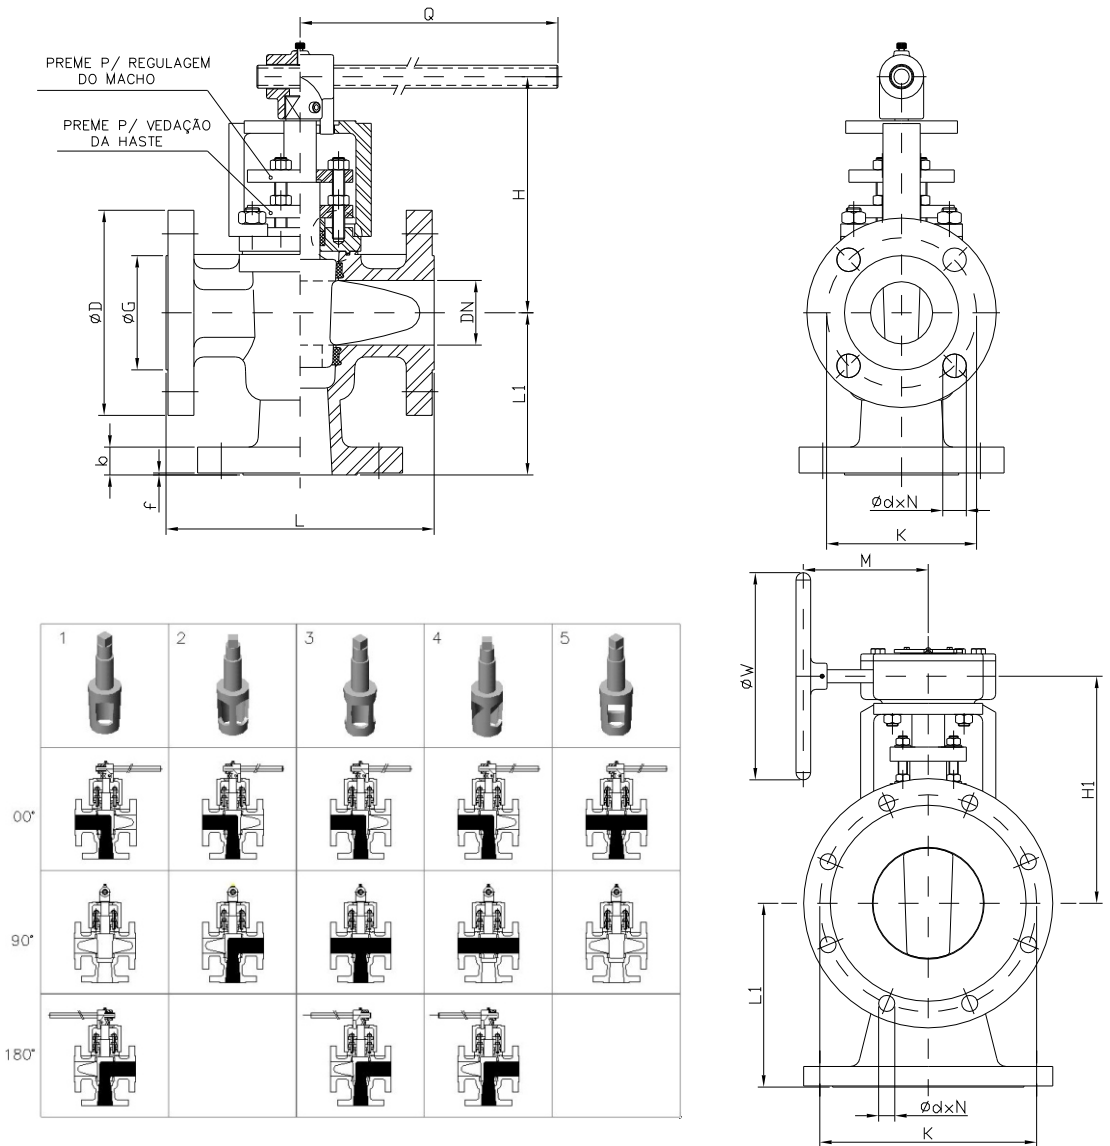

ANSI 150 LBS

DN	ØD	b	K	d X N	G	f	L	L1	ALAVANCA		REDUTOR MANUAL		
									H	Q	H1	ØW	M
1/2"	88.9	11.1	60.5	15.9 x 4	35.0	1.6	107.9	70.0	115.0	180.0	-*-	-*-	-*-
3/4"	98.6	12.7	69.9	15.9 x 4	42.9	1.6	117.5	73.2	115.0	180.0	-*-	-*-	-*-
1"	108.0	14.3	79.2	15.9 x 4	50.8	1.6	127.0	88.9	137.5	260.0	-*-	-*-	-*-
1.1/2"	127.0	17.5	98.6	15.9 x 4	73.2	1.6	165.1	104.9	147.5	360.0	-*-	-*-	-*-
2"	152.4	19.0	120.7	19.1 x 4	92.1	1.6	177.8	114.3	194.0	430.0	-*-	-*-	-*-
2.1/2"	177.8 ①	22.2	139.7	19.1 x 4	104.7	1.6	203.2 ①	130.3	230.0	430.0	-*-	-*-	-*-
3"	190.5	23.8	152.4	19.1 x 4	127.0	1.6	203.2	130.3	230.0	430.0	-*-	-*-	-*-
4"	228.6	23.8	190.5	19.1 x 8	157.2	1.6	228.6	152.4	256.0	600.0	222.5	170.0	120.0
6"	279.4	25.4	241.3	22.2 x 8	215.9	1.6	266.7	190.5	335.0	930.0	326.0	350.0	180.0
8"	342.9	28.6	298.5	22.2 x 8	269.7	1.6	292.2	228.6	-*-	-*-	345.0	350.0	180.0
10"	406.4	30.2	361.9	25.4 x 12 ②	323.8	1.6	330.2	279.4	-*-	-*-	455.0	400.0	260.0

ANSI 300 LBS

DN	ØD	b	K	d X N	G	f	L	L1	ALAVANCA		REDUTOR MANUAL		
									H	Q	H1	ØW	M
1/2"	95.3	14.2	66.7	15.9 x 4	35.0	1.6	139.7	73.2	115.0	180.0	-*-	-*-	-*-
3/4"	117.3	15.7	82.6	19.1 x 4	42.9	1.6	152.4	76.2	115.0	180.0	-*-	-*-	-*-
1"	124.0	17.5	88.9	19.1 x 4	50.8	1.6	165.1	95.3	137.5	260.0	-*-	-*-	-*-
1.1/2"	155.6	20.6	114.3	22.2 x 4	73.2	1.6	190.5	111.3	147.5	360.0	-*-	-*-	-*-
2"	165.1	22.2	127.0	19.1 x 8	92.1	1.6	215.9	120.7	194.0	430.0	-*-	-*-	-*-
2.1/2"	190.5 ①	28.4	149.2	22.2 x 8	104.7	1.6	282.6 ①	141.2	230.0	430.0	-*-	-*-	-*-
3"	209.6	28.6	168.1	22.2 x 8	127.0	1.6	282.6	141.2	230.0	430.0	-*-	-*-	-*-
4"	254.0	31.8	200.0	22.2 x 8	157.2	1.6	304.8	171.5	256.0	600.0	222.5	170.0	120.0
6"	317.5	36.6	269.7	22.2 x 12	215.9	1.6	403.2	215.9	335.0	930.0	326.0	350.0	180.0
8"	381.0	41.1	330.2	25.4 x 12	269.8	1.6	419.1	254.0	-*-	-*-	345.0	350.0	180.0

NOTAS: 1- DN 2.1/2" - SÃO UTILIZADOS FUNDIDOS DN 3" COM FLANGES USINADOS PARA 2.1/2".
2- DN 8", 10"; OS DOIS FUROS SUPERIORES DOS FLANGES SERÃO ROSCADOS DE ACORDO COM RESPECTIVOS PRISIONEIRO.